




Dimenzije mm	Radijus savijanja mm	Radni pritisak/ pritisak pucanja bar	Art.-Nr. u kolutu	Art.-Nr. na jezgri od tvrdog papira	Pak/m
6 x 1,0	35	30 / 90	0885 08 6	0885 080 6	25
8 x 1,0	45	20 / 65	0885 08 8	0885 080 8	
9 x 1,5	50	15 / 40	0885 08 9	0885 080 9	
10 x 1,0	60	15 / 40	0885 08 10	0885 080 10	
11 x 1,5	65	15 / 40	0885 08 11	0885 080 11	
12 x 1,5	70	18 / 55	0885 08 12	0885 080 12	
15 x 1,5	80	16 / 48	0885 08 15	0885 080 15	

Poliamidna crijeva PA 11/12

- Mala tolerancija.
- Boja: crna.
- Proizvodna norma: DIN 73378.
- Zahtjevi ispitivanja: DIN 74324.

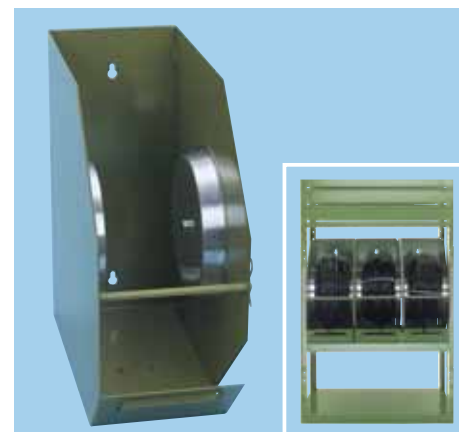

Umetak za dispencer za poliamidna crijeva

- Pogodno za ORSY u spoju sa policom 0961 4.
- Maksimalno 3 umetka po polici je moguće.

Art.-Nr. 0961 885 01

Art.-Nr. 0961 988 501



Dimenzije mm	Radni pritisak/pritisak pucanja	Art.-Nr.	Pak/m
11 x 3,5	10 / 50	0885 11 35	10/25
13 x 6,0	10 / 50	0885 13 60	

Kočiona crijeva

- DIN 74310

Materijal:

Sintetička guma sa srednjim tekstilnim slojem.



Rezač za crijeva

- Upotreba: plastično crijevo do Ø 15 mm.
- Dužina: 75 mm.

Art.-Nr. 0885 20 01

Pak/kom: 1



Kliješta za rezanje

- Upotreba: plastično crijevo do Ø 22 mm.

Art.-Nr. 0885 20 02

Pak/kom: 1

Zamjenska oštrica

Art.-Nr. 0885 20 020

Pak/kom: 2