





ORSY

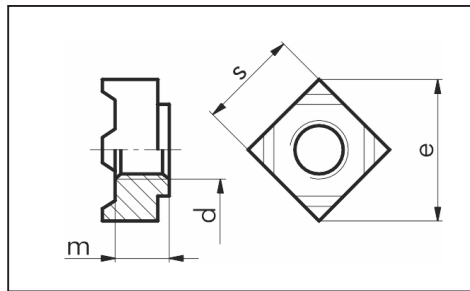


Navrtke za zavarivanje DIN 928

Čelik bez površinske zaštite
sa max. C-sadržajem od 0,25 %
A2

Ø navoja d	m mm	s mm	e mm	Čelik b. pov. z. Art.-Nr.	Pak./ kom.	A2 Art.-Nr.	Pak./ kom.
M 4	3,5	7	9	0385 04	100	0306 000 5 0306 000 6 0306 000 8	200
M 5	4,2	9	12	0385 05			
M 6	5	10	13	0385 06			
M 8	6,5	14	18	0385 08			
M 10	8	17	22	0385 010			
M 12	9,5	19	25	0385 012			



ORSY

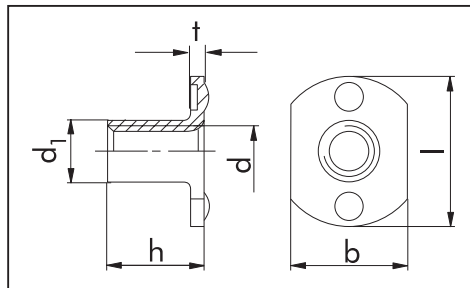

Navrtke za zavarivanje


Čelik bez površinske zaštite
Čelik pocinčani, plavo pasivirani
(A2K)

- Dozvoljava visoke momente pritezanja.

Ø navoja d	d ₁ mm	l mm	b mm	h mm	t mm	Broj zavarivač. ispupčenja	Čelik bez površ. zaš. Art.-Nr.	Pak./ kom.	Čelik poc., plavo pas. Art.-Nr.	Pak./ kom.
M 4	5	17	9	6	0,9	2	0385 4	100	0385 11	100
M 5	6,4	19	11	7,5	1,2	2	0385 5			
M 6	7,7	22	14	8,5	1,45	2	0385 6			
M 8	10,1	26	18	10	1,8	4	0385 8			
M 10	11,9	26	18	10,5	1,9	4	0385 10			



ORSY

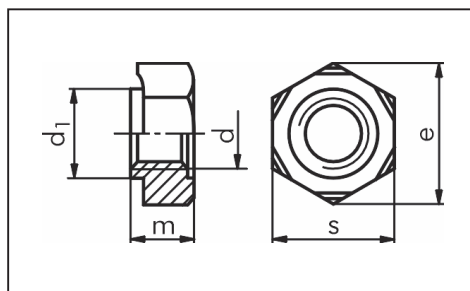

Šestougaone navrtke za zavarivanje DIN 929

Čelik
sa max. C-sadržajem od 0,25 %

Ø navoja d	d ₁ mm	s mm	e mm	m mm	Čelik Art.-Nr.	Pak./ kom.
M 3	4,5	7,5	8,15	3,0	0399 3	1000
M 4	6	9	9,83	3,5	0399 4	500
M 5	7	10	10,95	4,0	0399 5	
M 6	8	11	12,02	5,0	0399 6	
M 8	10,5	14	15,38	6,5	0399 8	
M 10	12,5	17	18,74	8,0	0399 10	
M 12	14,8	19	20,91	10,0	0399 12	250
M 14	16,8	22	24,27	11,0	0399 14	
M 16	18,8	24	26,51	13,0	0399 16	