


SL OSIGURAČI

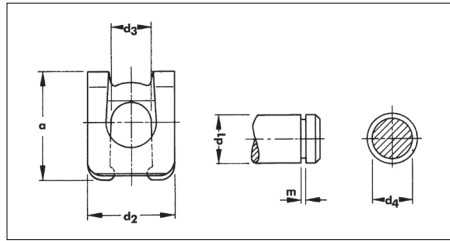


- Radijalni osigurač za osovine koji se može montirati i demontirati bez alata.
- Kompenzira uzdužne tolerancije zahvaljujući opružnom dejstvu kraka osigurača.
- Bez klopavanja zahvaljujući aksijalnom prednaprezanju.
- Dvostruko držanje za prevenciju od slučajnog udaranja.
- Visok aksijalni kapacitet opteretivosti.

Nom. dim. d ₁ mm	d ₄ mm	a mm	d ₂ mm	d ₃ mm	m mm	Art.-Nr. Čelik bez pov. z.	Pak./kom.
4,0	3,2	9,0	7,0	3,4	0,65	0491 4	50
5,0	4,0	11,0	9,0	4,2	0,75	0491 5	50
6,0	5,0	14,0	11,0	5,2	0,75	0491 6	50
8,0	6,0	17,5	14,0	6,2	0,95	0491 8	50
10,0	8,0	22,0	18,0	8,2	1,05	0491 10	25
12,0	9,0	26,0	22,0	9,4	1,15	0491 12	25
16,0	12,0	34,0	28,0	10,2	1,35	0491 16	25

Mogućnost ORSY® skladištenja

KL OSIGURAČI

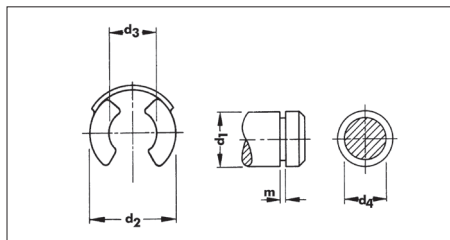

- Radijalni osigurač na krajevima osovine i distantni osigurač koji se može montirati i demontirati bez alata.
- Bez klopavanja, kompenzira tolerancije zahvaljujući pločastom vrhu.
- Visok aksijalni kapacitet opteretivosti.

Nom. dimenzija d ₁ mm	d ₄ mm	d ₂ mm	d ₃ mm	m mm	Art.-Nr. Čelik bez p. z.	Pak./kom.
4,0 - 5,0	3,2	6,8	2,8	0,5	0492 4	50
5,0 - 6,0	4,0	7,7	3,6	0,7	0492 5	50
6,0 - 8,0	5,0	10,6	4,6	0,7	0492 6	50
8,0 - 9,0	6,0	11,5	5,6	0,7	0492 8	50
10,0 - 12,0	8,0	16,0	7,5	0,9	0492 10	25
12,0 - 14,0	9,0	17,0	8,5	0,9	0492 12	25

Mogućnost ORSY® skladištenja

ASORTIMAN



Art.-Nr. 0964 491

Sadržaj:

6 dimenzija SL osigurača od 4 do 12 mm = 120 dijelova

6 dimenzija KL osigurača od 4 do 12 mm = 120 dijelova