
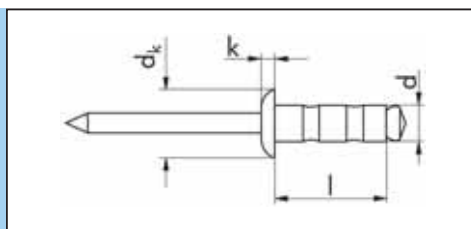


| d x l<br>mm | Izbušeni<br>otvor<br>Ø mm | Debljina<br>spajanja<br>mm | dk<br>mm | k<br>mm | dm<br>mm | Sila kid.<br>smica-<br>nje N | Sila kid.<br>zateza-<br>nje N | Art.-Nr.           | Pak/<br>kom |
|-------------|---------------------------|----------------------------|----------|---------|----------|------------------------------|-------------------------------|--------------------|-------------|
| 3,0 x 6,7   | 3,1 – 3,3                 | 0,8 – 4,3                  | 6,5      | 1,1     | 1,7      | 700                          | 820                           | <b>0915 300 43</b> | 500         |

## Slijepe zakovice Plijsnata okrugla glava

Čahura: aluminijum  
Trn: čelik cinčan, plavo pasiviran (A2K)


Područje zakivanja srednje čvrstoće

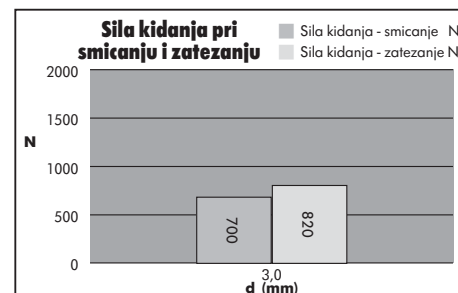


| d x l<br>mm | Izbušeni<br>otvor<br>Ø mm | Debljina<br>spajanja<br>mm | dk<br>mm | k<br>mm | dm<br>mm | Sila kid.<br>smica-<br>nje N | Sila kid.<br>zateza-<br>nje N | Art.-Nr.            | Pak/<br>kom |
|-------------|---------------------------|----------------------------|----------|---------|----------|------------------------------|-------------------------------|---------------------|-------------|
| 3,2 x 8,0   | 3,3 – 3,5                 | 0,8 – 4,8                  | 6,4      | 1,1     | 1,8      | 750                          | 820                           | <b>0915 593 28</b>  | 500         |
| 3,2 x 11,0  | 3,3 – 3,5                 | 4,0 – 8,0                  | 6,4      | 1,1     | 1,8      | 750                          | 820                           | <b>0915 593 211</b> | 500         |
| 4,0 x 10,0  | 4,1 – 4,3                 | 1,2 – 6,3                  | 8,0      | 1,4     | 2,2      | 1200                         | 1600                          | <b>0915 594 010</b> | 500         |
| 4,0 x 13,0  | 4,1 – 4,3                 | 4,0 – 9,6                  | 8,0      | 1,4     | 2,2      | 1200                         | 1600                          | <b>0915 594 013</b> | 500         |
| 4,0 x 17,0  | 4,1 – 4,3                 | 6,4 – 12,7                 | 8,0      | 1,4     | 2,2      | 1200                         | 1600                          | <b>0915 594 017</b> | 250         |
| 4,8 x 10,0* | 4,9 – 5,1                 | 1,6 – 6,3                  | 9,6      | 1,6     | 2,7      | 1600                         | 2230                          | <b>0915 594 810</b> | 250         |
| 4,8 x 15,0  | 4,9 – 5,1                 | 4,8 – 11,1                 | 9,6      | 1,6     | 2,7      | 1600                         | 2230                          | <b>0915 594 815</b> | 250         |
| 4,8 x 25,0  | 4,9 – 5,1                 | 12,7 – 19,8                | 9,6      | 1,6     | 2,7      | 1600                         | 2230                          | <b>0915 594 825</b> | 250         |

## Slijepe zakovice Plijsnata okrugla glava

Čahura: aluminijum, crno eloksiran  
Trn: čelik cinčan, plavo pasiviran (A2K)

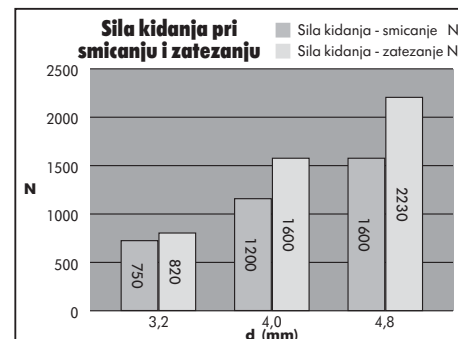

\* Odobrenje od građevinskog nadzora za Ø 4,8

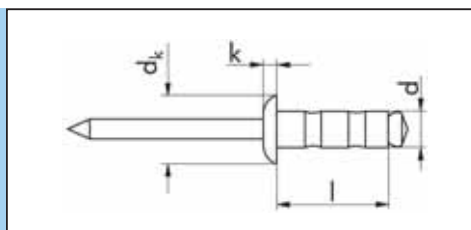


| d x l<br>mm | Izbušeni<br>otvor<br>Ø mm | Debljina<br>spajanja<br>mm | dk<br>mm | k<br>mm | dm<br>mm | Sila kid.<br>smica-<br>nje N | Sila kid.<br>zateza-<br>nje N | Art.-Nr.            | Pak/<br>kom |
|-------------|---------------------------|----------------------------|----------|---------|----------|------------------------------|-------------------------------|---------------------|-------------|
| 3,2 x 8     | 3,3 – 3,5                 | 0,8 – 4,8                  | 6,4      | 1,1     | 1,8      | 750                          | 820                           | <b>0915 583 28</b>  | 500         |
| 3,2 x 11    | 3,3 – 3,5                 | 4,0 – 8,0                  | 6,4      | 1,1     | 1,8      | 750                          | 820                           | <b>0915 583 211</b> | 500         |
| 4,0 x 10    | 4,1 – 4,3                 | 1,2 – 6,3                  | 8,0      | 1,4     | 2,2      | 1200                         | 1600                          | <b>0915 584 010</b> | 500         |
| 4,0 x 13    | 4,1 – 4,3                 | 4,0 – 9,6                  | 8,0      | 1,4     | 2,2      | 1200                         | 1600                          | <b>0915 584 013</b> | 500         |
| 4,8 x 10*   | 4,9 – 5,1                 | 1,6 – 6,3                  | 9,6      | 1,6     | 2,7      | 1600                         | 2230                          | <b>0915 584 810</b> | 250         |
| 4,8 x 15    | 4,9 – 5,1                 | 4,8 – 11,1                 | 9,6      | 1,6     | 2,7      | 1600                         | 2230                          | <b>0915 584 815</b> | 250         |

## Slijepe zakovice Plijsnata okrugla glava

Čahura: aluminijum, lakirana glava  
RAL 9010

Trn: čelik cinčan, plavo pasiviran (A2K)

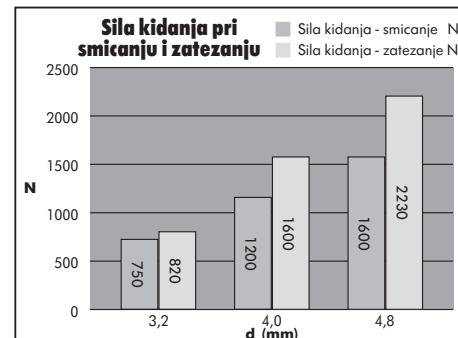

\* Odobrenje od građevinskog nadzora za Ø 4,8