



Slijepe zakovice

Upuštena glava 120°

Čahura: aluminijum
Trn: čelik pocinčan, plavo pasiviran (A2K)

Standardno područje zakivanja

d x l mm	Prečnik otvora Ø mm	Područje stezanja mm	dk mm	k mm	dm mm	Sila kid. smicanje N	Sila kid. zatezanje N	Art.-Nr.	Pak/kom
3,0 x 6,0	3,1	1,5 – 3,5	6,0	0,9	1,8	850	850	0938 3 6	500
3,0 x 8,0	3,1	3,5 – 5,5						0938 3 8	500
3,0 x 10,0	3,1	5,5 – 7,0						0938 3 10	500
3,0 x 12,0	3,1	7,0 – 9,0						0938 3 12	500
4,0 x 6,0	4,1	1,5 – 3,0	7,5	1,0	2,2	1300	1960	0938 4 6	500
4,0 x 8,0	4,1	3,0 – 5,0						0938 4 8	500
4,0 x 10,0	4,1	5,0 – 6,5						0938 4 10	500
4,0 x 12,0	4,1	6,5 – 8,5						0938 4 12	500
4,0 x 16,0	4,1	10,5 – 12,5						0938 4 16	500
4,0 x 20,0	4,1	14,5 – 16,5						0938 4 20	500
5,0 x 8,0	5,1	3,0 – 4,5	9,0	1,2	2,25	2150	3000	0938 5 8	500
5,0 x 10,0	5,1	4,5 – 6,0						0938 5 10	500
5,0 x 12,0	5,1	6,0 – 8,0						0938 5 12	500
5,0 x 16,0	5,1	10,0 – 12,0						0938 5 16	500
5,0 x 20,0	5,1	14,0 – 16,0						0938 5 20	250
5,0 x 25,0	5,1	16,0 – 21,0						0938 5 25	250

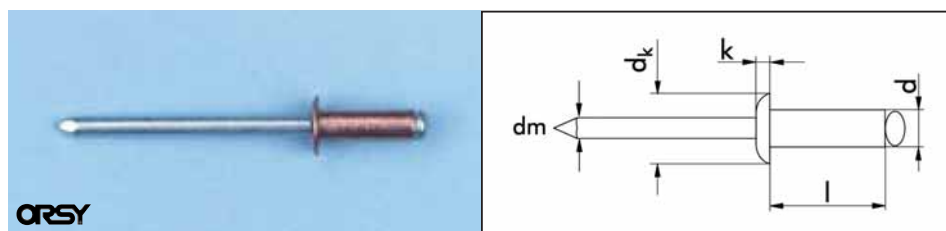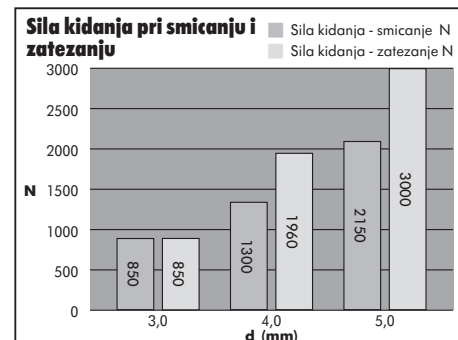

Slijepe zakovice

Ravna zaobljena glava

Čahura: bakar
Trn: čelik pocinčan, plavo pasiviran (A2K)

d x l mm	Prečnik otvora Ø mm	Područje stezanja mm	dk mm	k mm	dm mm	Sila kid. smicanje N	Sila kid. zatezanje N	Art.-Nr.	Pak/kom
3,0 x 6,0	3,1	1,5 – 3,5	6,5	0,8	2,0	650	900	0940 3 6	500
3,0 x 8,0	3,1	3,5 – 5,5	6,5	0,8	2,0	650	900	0940 3 8	500
4,0 x 6,0	4,1	1,0 – 3,5	8,0	1,0	2,4	1400	2000	0940 4 6	500
4,0 x 8,0	4,1	3,5 – 4,5	8,0	1,0	2,4	1400	2000	0940 4 8	500
4,0 x 10,0	4,1	4,5 – 6,5	8,0	1,0	2,4	1400	2000	0940 4 10	500
4,0 x 12,0	4,1	6,5 – 8,5	8,0	1,0	2,4	1400	2000	0940 4 12	500

