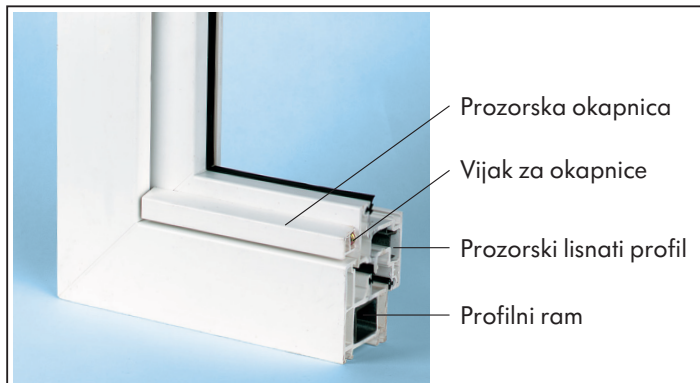


Vijci za okapnice i roletne

za učvršćivanje prozorskih profila, vodilica roletni i okapnica


Primjena: Prozorske okapnice









Vaše prednosti:

- Direktno pričvršćivanje bez prethodnog bušenja.
- Precizno uvrćanje vijka zahvaljujući džepu za skupljanje strugotine u podnožju glave vijka.
- Precizno centriranje.

Primjena: Roletne

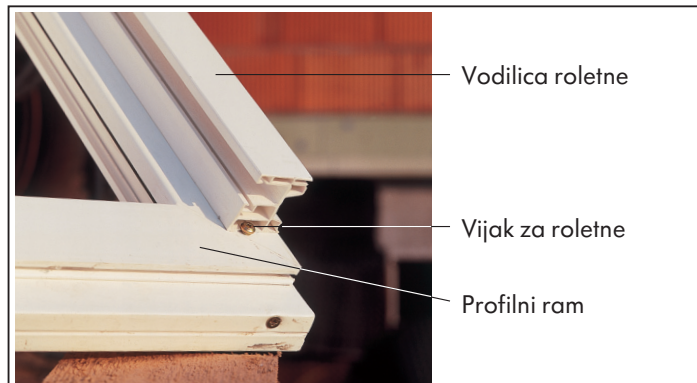

			 ORSY 	 ORSY 	 ORSY 
			Sa navojnim vrhom za instalaciju u plastične profile	Sa plastičnom glavom i navojnim vrhom za instalaciju u plastične profile	Sa vrhom za bušenje za instalaciju u plastične profile sa metalnim ojačanjem
Dimenzije Ø D ₁ x L			4,0 x 10	3,5 x 10	4,0 x 13
Materijal			● Čelik pocinčani	● Stezna glava od polyamida ojačanog staklenim vlaknima ● Vijak: čelik pocinčani.	● Čelik pocinčani
Prihvat			PH 2	PH 2	PH 2
Za profil od	Stezni Ø D _{KL}	Pak/kom	plavo pasivirani Art.-Nr.	plavo pasivirani Art.-Nr.	plavo pasivirani Art.-Nr.
Aluplast	5,6	1000	0185 556 100	–	–
Veka Roplasto EXTE Brüggmann Salamander	6,8		0185 568 100	0185 568 010	0185 568 13
Höku	7,0		0185 570 100	–	–
Rehau Thyssen Gromathic O & S Plus Plan Helmitin	7,4		0185 574 100	0185 574 010	0185 574 13
Schüco SKS	9,0		0185 590 100 ¹	–	–
Kömmerling	8,6		0185 586 100	0185 586 010	0185 586 13
Gealan	8,1		0185 581 100	–	–
Trocal Stöckel	8,4		0185 584 100	–	0185 584 12 ²

¹ Dimenzije Ø D₁ x L: 4,0 x 9 mm, ² Dimenzije Ø D₁ x L: 4,0 x 12 mm