

VDE odvijači EN 60900, IEC 60900

1000 V



- Komadno ispitivanje u vodenoj kupki sa testnim naponom od 10 kV.
- Za rad pod naponom do 1000 Volt (AC), do 1500 Volt (DC).
- Označavanje sa godinom proizvodnje.
- Niskotemperaturni udarni test na -40°C (oznaka C).

VDE odvijači Ravni

Oštrica: okrugla, izolirana, brunirana.
Prihvati: DIN 5264-A, ISO 2380,
Norma: EN 60900, IEC 60900.




mm	A mm	B/C mm	A inch	Art.-Nr.	
0,30 x 1,5	40	100/20	1 9/16"	0613 486 015	1
0,30 x 1,8	60	100/20	2 3/8"	0613 486 018	
0,40 x 2,0	60	100/20	2 3/8"	0613 486 020	
0,40 x 2,5	75	100/20	3"	0613 486 025	
0,50 x 3,0	75	100/20	3"	0613 486 030	

VDE odvijači Krstasti (PH)

Oštrica: okrugla, izolirana, brunirana.
Prihvati: ISO 8764-PH.
Norma: EN 60900, IEC 60900.



	A mm	B/C mm	A inch	Art.-Nr.	
PH 00	40	100/20	1 9/16"	0613 487 00	1
PH 0	60	100/20	2 3/8"	0613 487 0	

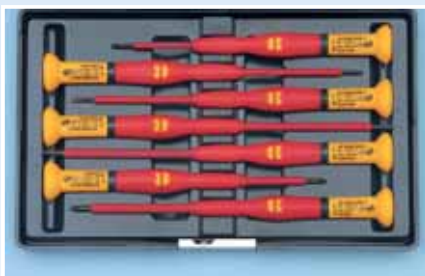

Set odvijača u plastičnoj kutiji VDE ravni i krstasti odvijači

Art.-Nr. 0613 489 4

mm	Art.-Nr.		Art.-Nr.	
0,30 x 1,5	0613 486 015	PH 00	0613 487 00	1
0,30 x 1,8	0613 486 018	PH 0	0613 487 0	
0,40 x 2,0	0613 486 020			
0,40 x 2,5	0613 486 025			
0,50 x 3,0	0613 486 030			