


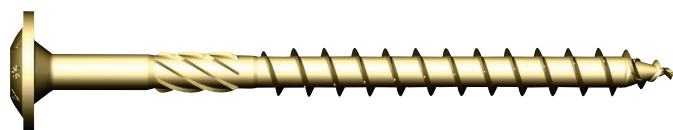



ASSY® 3.0 SK



ASSY®

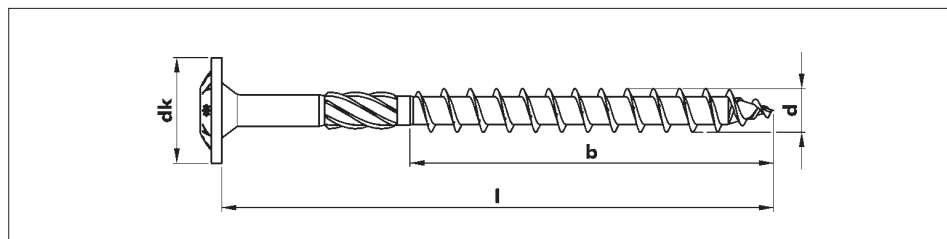

Sa velikom glavom u obliku podloške za drvo gradnju, stolarstvo, spajanje u gradnji stubišta, raznih elemenata, gradnji drvenih i pasivnih kuća.

Napomena:

Vijak ne koristiti za spojeve koji su direktno izloženi atmosferskom uticaju, u vlažnim prostorijama i atmosferi koja sadrži gasove hlora.

Vrh

Vrh od 34° omogućuje precizno postavljanje i upotrebu. Vijak sa kontra navojem u zoni vrha znatno reducira sile cijepanja drveta, naročito u rubnom području. Obrtni moment zavrtnja je znatno manji nego kod uobičajenih iver vijaka i to se pozitivno odražava na životni vijek mašine kojom se radi kao i na trajnost bitseva.

Navoj

Zbog plastično-kliznog premaza na asimetričnom grubom navoju – 30% ušteda na vremenu u radu.

Ø d mm	L mm	b mm	Vrete- nasto glodalo	dk mm	Pogon	Art.-Nr. Čelik pocinčan, žuto pasiviran	P/kom
6,0	60	37		14	AW® 30	0184 806 60	100
6,0	70	42	x	14	AW® 30	0184 806 70	100
6,0	80	50	x	14	AW® 30	0184 806 80	100
6,0	90	50	x	14	AW® 30	0184 806 90	100
6,0	100	60	x	14	AW® 30	0184 806 100	100
6,0	110	70	x	14	AW® 30	0184 806 110	100
6,0	120	70	x	14	AW® 30	0184 806 120	100
6,0	140	70	x	14	AW® 30	0184 806 140	100
6,0	160	70	x	14	AW® 30	0184 806 160	100
6,0	180	70	x	14	AW® 30	0184 806 180	100
6,0	200	70	x	14	AW® 30	0184 806 200	100
6,0	220	70	x	14	AW® 30	0184 806 220	100
6,0	240	70	x	14	AW® 30	0184 806 240	100
6,0	260	70	x	14	AW® 30	0184 806 260	100
6,0	280	70	x	14	AW® 30	0184 806 280	100
6,0	300	70	x	14	AW® 30	0184 806 300	100
8,0	80	50	x	22	AW® 40	0184 808 80	50
8,0	100	60	x	22	AW® 40	0184 808 100	50
8,0	120	80	x	22	AW® 40	0184 808 120	50
8,0	140	80	x	22	AW® 40	0184 808 140	50
8,0	160	80	x	22	AW® 40	0184 808 160	50
8,0	180	80	x	22	AW® 40	0184 808 180	50
8,0	200	80	x	22	AW® 40	0184 808 200	50
8,0	220	100	x	22	AW® 40	0184 808 220	50
8,0	240	100	x	22	AW® 40	0184 808 240	50
8,0	260	100	x	22	AW® 40	0184 808 260	50
8,0	280	100	x	22	AW® 40	0184 808 280	50
8,0	300	100	x	22	AW® 40	0184 808 300	50
8,0	320	100	x	22	AW® 40	0184 808 320	50
8,0	340	100	x	22	AW® 40	0184 808 340	50
8,0	360	100	x	22	AW® 40	0184 808 360	50
8,0	380	100	x	22	AW® 40	0184 808 380	50
8,0	400	100	x	22	AW® 40	0184 808 400	50

Vretenasto glodalo

Vretenasto glodalo iza navoja smanjuje obrtni moment zavrtnja za 20%.

Tanka drška (vrat)

Tanka drška (vrat) omogućuje nenapregnutu spajanje bez međuprostora.

AW®-pogon

- Bolji prenos snage.
- Optimalno centriranje.
- Dugotrajnost.
- Ravnomjeran prenos snage sprječava oštećenja na površinskoj zaštiti.

Materijal

Čelik kaljeni, pocinčan, žuto pasiviran.

Dodatni artikli:

Mašina BS 13 SEC, Art.-Nr. 0702 315
Bits AW®-pogon, Art.-Nr. 0614 51..