

# Okasto- viljuškasti ključ ekstra dugi

## Izvedba: metrička, ekstra dugi oblik


Pogon: okasta strana POWERDRIV® 12-kt  
Standard: DIN 3113B / ISO 3318 / 7738.

Materijal: krom-vanadijum-čelik.


Površina: kromirana,  
glava i okasti pogon su polirani.

Geometrija: okasta strana 15°, savijena,  
viljuškasta strana zakrenuta za 15°.

12-kt. na okastoj strani i 15° zakrenuta  
viljuškasta strana stoje u optimalnom  
odnosu spram drške. Tako se dobija  
minimalni obrtni ugao.

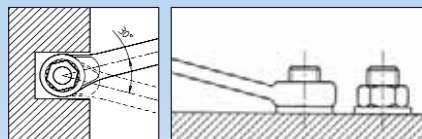

Ugao od 15° okastog ključa  
omogućuje više slobodnog prostora  
za prste odnosno za savlađivanje  
prepreka.

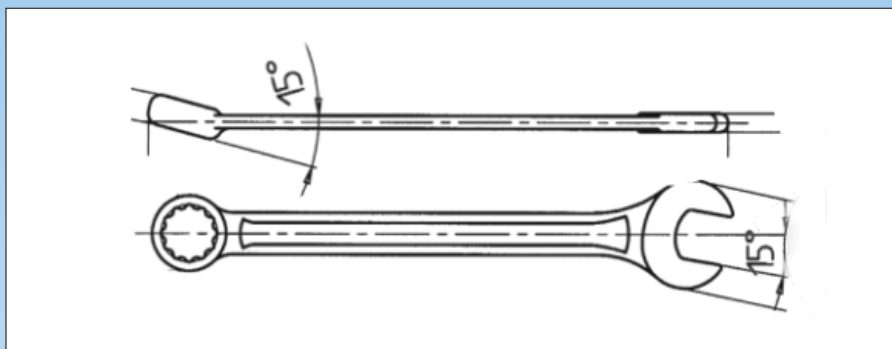

mm	L mm	a1 mm	a2 mm	Ø d mm	b mm	Art.-Nr.	
8	170	7,5	4,5	13	20	0713 308 08	1
9	180	8	4,5	14,5	22	0713 308 09	
10	190	8,5	5	16	23,5	0713 308 10	
11	200	9	5,5	17	25,5	0713 308 11	
12	210	9,5	6	19	28	0713 308 12	
13	225	10	6,5	20	29,5	0713 308 13	
14	235	11	7	21,5	31,5	0713 308 14	
15	250	12	7,5	23	33,5	0713 308 15	
16	265	13	8	24,5	36,5	0713 308 16	
17	280	14	8,5	26	37	0713 308 17	
18	295	15	9	28	40,5	0713 308 18	
19	310	16	9,5	29	41,5	0713 308 19	
20	310	16	9,5	31	44,5	0713 308 20	
21	340	17	10	33	46,5	0713 308 21	
22	350	18	11	34	48	0713 308 22	
24	400	19	12	37	51	0713 308 24	
27	450	20	13	41	58	0713 308 27	
30	480	21	14	46	63	0713 308 30	
32	500	22	15	49	66	0713 308 32	
34	520	23	15	53	70	0713 308 34	
36	550	24	16	57	73	0713 308 36	
41	600	26	16	63	86	0713 308 41	
46	640	27	17,5	69,5	96	0713 308 46	

## Set okasto-viljuškastih ključeva

Set	mm	Art.-Nr.	
11	8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22	0713 308 50	1
12	10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32	0713 308 51	

