

Pojedinačno pričvršćivanje (M6 – M20):

Beton bez pukotina (ETA-05/0019)

Višestruko pričvršćivanje: ankerisanje laganih stropnih obloga i podstropova:

Beton sa i bez bukotina

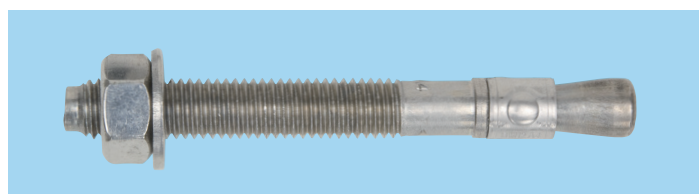
(M6: ETA-06/0162 / M6 – M10: DIBt Z-21.1-1598)


Fix-anker W-FA/A4, nehrđajući čelik A4

Tipla- Ø [mm]	Naziv - oznaka	Visina pričvršćiv. $t_{fix} / t_{fix,red}$ [mm]	Ukupna dužina l [mm]	Efektivna dubi- na ankerisanja $h_{ef} / h_{ef,red}$ [mm]	Navoj [Ø x dužina]	Odobrenje ETA Opcija 7 Spušteni strop	Odobrenje DIBt Spušteni strop	Art.-Nr.	Pak [kom]	
M6	W-FA/A4 M6-5/40	5	40	40 / 30	M6 x 16	05/0019 06/0162	Z-21.1-1598	0904 411 061	100	
	W-FA/A4 M6-10-20/67	10 / 20	67	40 / 30	M6 x 30			0904 411 065		
	W-FA/A4 M6-25-35/82	25 / 35	82	40 / 30	M6 x 35			0904 411 066		
	W-FA/A4 M6-40-50/97	40 / 50	97	40 / 30	M6 x 35			0904 411 067		
M8	W-FA/A4 M8-10-19/75	10 / 19	75	44 / 35	M8 x 40	05/0019	Z-21.1-1598	0904 411 083		
	W-FA/A4 M8-15-24/80	15 / 24	80	44 / 35	M8 x 45			0904 411 084		
	W-FA/A4 M8-30-39/95	30 / 39	95	44 / 35	M8 x 60			0904 411 087		
	W-FA/A4 M8-55-64/120	55 / 64	120	44 / 35	M8 x 85			0904 411 089		
M10	W-FA/A4 M10-10-16/85	10 / 16	85	48 / 42	M10 x 40	05/0019	Z-21.1-1598	0904 411 002		50
	W-FA/A4 M10-15-21/90	15 / 21	90	48 / 42	M10 x 45			0904 411 003		
	W-FA/A4 M10-20-26/95	20 / 26	95	48 / 42	M10 x 50			0904 411 004		
	W-FA/A4 M10-30-36/105	30 / 36	105	48 / 42	M10 x 60			0904 411 005		
W-FA/A4 M10-45-51/120	45 / 51	120	48 / 42	M10 x 75	0904 411 006					
M12	W-FA/A4 M12-15-30/110	15 / 30	110	65 / 50	M12 x 65	05/0019	-	0904 411 204	25	
	W-FA/A4 M12-30-45/125	30 / 45	125	65 / 50	M12 x 80			0904 411 206		
	W-FA/A4 M12-85-100/180	85 / 100	180	65 / 50	M12 x 80			0904 411 209		
	W-FA/A4 M12-105-120/200	105 / 120	200	65 / 50	M12 x 80			0904 411 210		
M16	W-FA/A4 M16-30-48/150	30 / 46	150	80 / 64	M16 x 90	05/0019	-	0904 411 604	20	
	W-FA/A4 M16-100-118/220	100 / 116	220	80 / 64	M16 x 80			0904 411 607		
M20	W-FA/A4 M20-35-57/180	35 / 57	180	100 / 78	M20 x 70	05/0019	-	0904 412 002	10	

Višestruko pričvršćivanje: ankerisanje laganih stropnih obloga i podstropova (M6):

Beton sa i bez pukotina (ETA-06/0235)


Fix-anker W-FA/HCR, čelik visoko otporan na koroziju (isporuka putem posebne narudžbe)

Tipla- Ø [mm]	Naziv - oznaka	Visina pričvršćiv. $t_{fix} / t_{fix,red}$ [mm]	Ukupna dužina l [mm]	Efektivna dubi- na ankerisanja $h_{ef} / h_{ef,red}$ [mm]	Navoj [Ø x dužina]	Odobrenje ETA Spušteni strop	Odobrenje DIBt	Art.-Nr.	Pak [kom]
M6	W-FA/HCR M6-10/57	- / 10	57	40 / 30	M6 x 20	06/0235	-	Posebna nabavka	100
	W-FA/HCR M6-10-20/67	10 / 20	67	40 / 30	M6 x 20				
	W-FA/HCR M6-25-35/82	25 / 35	82	40 / 30	M6 x 20				
	W-FA/HCR M6-40-50/97	40 / 50	97	40 / 30	M6 x 20				