




ORSY

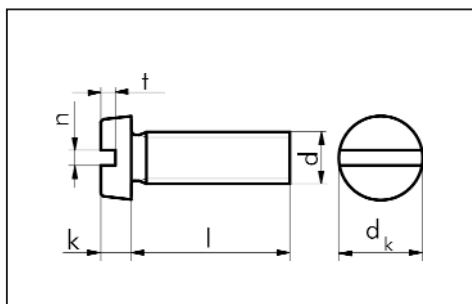

# Vijak sa cilindričnom glavom

sa ravnim prerezom po DIN 84 (ISO 1207)

Mesing bez površ. zaštite (CuZn 37)  
 Čelik 4.8 bez površinske zaštite  
 Čelik 4.8 pocinčan, plavo pasiviran  
 Čelik 4.8 pocinčan, žuto pasiviran  
**A2**   
**A4**

Nom.-Ø d	M 2	M 2,5	M 3	M 3,5	M 4	M 5	M 6	M 8	M 10	M 12
d <sub>k</sub> mm	3,8	4,5	5,5	6,0	7,0	8,5	10,0	13,0	16,0	18,0
k mm	1,3	1,6	2,0	2,4	2,6	3,3	3,9	5,0	6,0	7,0
n mm	0,5	0,6	0,8	1,0	1,2	1,2	1,6	2,0	2,5	2,5
t mm	0,6	0,7	0,85	1,0	1,1	1,3	1,6	2,0	2,4	2,4



## Asortiman

Vijak sa cilindričnom glavom sa ravnim prerezom, DIN 84, čelik pocinčan, plavo pasivirani, 1350 dijelova

Artikal:  
 0040 3 x 10/16/20/25  
 0040 4 x 10/16/20/25  
 0040 5 x 10/20/30/40  
 0040 6 x 16/20/25/30  
 duboko izvučeni uložak, Art.-Nr. 0955 801 6

**Art.-Nr. 0964 040**

Vijci sa cilindrič. glavom sa ravnim prerez., DIN 84, nehrđajući čelik A2, 1340 dijelova  
 Artikal:

0287 4 x 8/10/16/20  
 0287 5 x 8/10/12/16/20/30  
 0287 6 x 16/20/25/30/35/40  
 duboko izvučeni uložak, Art.-Nr. 0955 801 6

**Art.-Nr. 0964 287**

Vijci, DIN 963, DIN 84, pocinčani, plavo pasivirani; navrtke DIN 934-8, pocinčane, plavo pasivirane; podroške, DIN 125A, pocinčane, plavo pasivirane 1200 dijelova  
 Artikal:

0039 4 x 10/5 x 16/6 x 20  
 0040 4 x 10/16/20  
 0040 5 x 10/16/20  
 0040 6 x 16/20/25  
 0317 4/5/6  
 0407 4/5/6  
 duboko izvučeni uložak, Art.-Nr. 0955 801 8

**Art.-Nr. 0964 040 I**

Nominal. Ø d	Dužina l mm	Mesing bez površ. zaštite Art.-Nr.	P/kom	Čelik 4.8 bez površ. zaštite Art.-Nr.	P/kom	Čelik 4.8 poc., plavo pasiv. Art.-Nr.	P/kom	Čelik 4.8 poc., žuto pasiv. Art.-Nr.	P/kom	A2  Art.-Nr.	P/kom	A4  Art.-Nr.	P/kom
M 2	3			<b>0040 02 3</b>		<b>0040 2 3</b>	2000	<b>0040 72 3</b>					
	4	<b>0001 2 4</b>	500/2000	<b>0040 02 4</b>		<b>0040 2 4</b>		<b>0040 72 4</b>	2000	<b>0287 2 4</b>	1000		
	5	<b>0001 2 5</b>		<b>0040 02 5</b>		<b>0040 2 5</b>	100/500	<b>0040 72 5</b>		<b>0287 2 5</b>	50		
	6	<b>0001 2 6</b>		<b>0040 02 6</b>		<b>0040 2 6</b>		<b>0040 72 6</b>	500/2000	<b>0287 2 6</b>			
	8	<b>0001 2 8</b>	2000	<b>0040 02 8</b>		<b>0040 2 8</b>		<b>0040 72 8</b>		<b>0287 2 8</b>	1000		
	10	<b>0001 2 10</b>		<b>0040 02 10</b>		<b>0040 2 10</b>	500	<b>0040 72 10</b>		<b>0287 2 10</b>	500		
	12	<b>0001 2 12</b>	200	<b>0040 02 12</b>	2000	<b>0040 2 12</b>	100/500	<b>0040 72 12</b>					
	14	<b>0001 2 14</b>		<b>0040 02 14</b>		<b>0040 2 14</b>	2000						
	16	<b>0001 2 16</b>		<b>0040 02 16</b>		<b>0040 2 16</b>	100/500	<b>0040 72 16</b>					
	18			<b>0040 02 18</b>		<b>0040 2 18</b>	2000			<b>0287 2 18</b>	1000		
M 2,5	20	<b>0001 2 20</b>	2000	<b>0040 02 20</b>		<b>0040 2 20</b>	100/500	<b>0040 72 20</b>					
	22	<b>0001 2 22</b>		<b>0040 02 22</b>		<b>0040 2 22</b>							
	25	<b>0001 2 25</b>		<b>0040 02 25</b>		<b>0040 2 25</b>	2000						
	30	<b>0001 2 30</b>		<b>0040 02 30</b>		<b>0040 2 30</b>							
	3			<b>0040 025 3</b>		<b>0040 25 3</b>	2000			<b>0287 25 3</b>			
	4	<b>0001 25 4</b>	2000	<b>0040 025 4</b>		<b>0040 25 4</b>	100	<b>0040 725 4</b>	2000	<b>0287 25 4</b>	1000		
	5	<b>0001 25 5</b>		<b>0040 025 5</b>		<b>0040 25 5</b>		<b>0040 725 5</b>		<b>0287 25 5</b>			
	6	<b>0001 25 6</b>		<b>0040 025 6</b>		<b>0040 25 6</b>		<b>0040 725 6</b>		<b>0287 25 6</b>			
	8	<b>0001 25 8</b>	500	<b>0040 025 8</b>		<b>0040 25 8</b>	100/500	<b>0040 725 8</b>	500/2000	<b>0287 25 8</b>		<b>0289 25 8</b>	1000
	10	<b>0001 25 10</b>	2000	<b>0040 025 10</b>		<b>0040 25 10</b>		<b>0040 725 10</b>		<b>0287 25 10</b>	500		
12	<b>0001 25 12</b>	200	<b>0040 025 12</b>	2000	<b>0040 25 12</b>		<b>0040 725 12</b>	500	<b>0287 25 12</b>	100			
14	<b>0001 25 14</b>		<b>0040 025 14</b>		<b>0040 25 14</b>	2000	<b>0040 725 14</b>	2000	<b>0287 25 14</b>				
16	<b>0001 25 16</b>	2000	<b>0040 025 16</b>		<b>0040 25 16</b>	100/500	<b>0040 725 16</b>	500	<b>0287 25 16</b>	1000			
18			<b>0040 025 18</b>		<b>0040 25 18</b>	2000	<b>0040 725 18</b>	2000	<b>0287 25 18</b>	500	<b>0289 25 18</b>	2000	
20	<b>0001 25 20</b>	1000	<b>0040 025 20</b>		<b>0040 25 20</b>	100/500	<b>0040 725 20</b>	500	<b>0287 25 20</b>	200			
22			<b>0040 025 22</b>		<b>0040 25 22</b>	2000	<b>0040 725 22</b>	2000	<b>0287 25 22</b>	500			